

***RBS/AV***

High Vacuum Blowers



**ROBUSCHI®**  
PUMPS AND BLOWERS

The **ROBUSCHI RBS/AV series blowers** are positive displacement blowers used for vacuum installation as booster in combination with primary vacuum pumps when operating at their lowest pressure limit.

- Vacuum pressure from 0,01 to 20 mbar abs.
- Suction capacity from 300 to 8800 m<sup>3</sup>/h
- Suction of gases and vapours
- Lack of sliding parts, no wear
- Safe operation and low maintenance

## FEATURES

The ROBUSCHI **RBS/AV** series blowers are made of two conjugate rotors which rotate inside a special design casing with tight clearances (hundredth of millimetre) in all position, assuring gas sealing without contact between parts.

The rotors are synchronized by gears with high high precision involute toothing, granting high rotational speed.

### Compression chamber sealing

The separation between compression chamber and bearing housings is made with labyrinth seals avoiding atomized oil to enter the compression chamber. The sealing between compression chamber and environment is ensured by seals (O-RINGS) in FKM elastomer set against ground surfaces. The close dimensional tolerances are obtained thanks to the ROBUSCHI technologies, that provide rotor grinding in the production cycle.

## OPERATION

The **RBS/AV** series blowers have to be used in series with a primary vacuum system according to the diagram and they can not be used in the field of pressures higher than 50 mbar absolute (for these applications it is possible to employ the ROBUSCHI **RB-DV** air injection blowers) because of the too high absorbed power as well as rotor and casing overheating.



### Shaft-end sealing

The shaft end sealing is made by two seal rings in FKM elastomer with opposite lips, lubricated by a fitted oiler.

The oil ring housing can be cooled by water circulation.

According to specifications, the shaft is protected by an hardened replaceable sleeve.

### Materials

The blowers are made of cast iron with rotors in carbon steel or in nodular cast iron depending on the size.


These materials assure good performance at standard operating conditions with gases or vapours.

Besides this, for corrosive gases or vapours pumping, the parts in contact can be coated with a stainless nickel alloy.

Available **RBS/AV in ATEX version on request.**

The **RBS/AV** blower has to be started only after the **VP** primary vacuum system has reduced the absolute pressure of the plant to a value lower than 50 mbar.

ROBUSCHI can supply primary vacuum system with liquid ring vacuum pumps (**RVS** series), reaching capacity up to a 4.200 m<sup>3</sup>/h (See Robuschi liquid ring vacuum pumps catalogue).

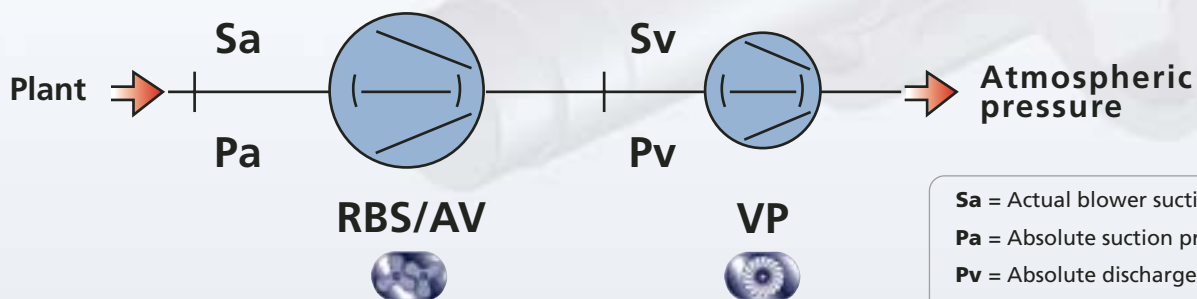


- Sa** = Actual blower suction capacity
- Pa** = Absolute suction pressure
- Pv** = Absolute discharge pressure
- VP** = Primary vacuum

## APPLICATION FIELDS

PROCESS	DESCRIPTION	FIELD	Residual pressure (mbar abs)
Several applications	<ul style="list-style-type: none"> <li>lifting</li> <li>transportation</li> <li>fixing</li> <li>packing</li> </ul>	<ul style="list-style-type: none"> <li>food industry</li> <li>vaccum packing</li> </ul>	
Metal production under vacuum	<ul style="list-style-type: none"> <li>melting</li> <li>founding</li> <li>glowing</li> <li>steel degasing</li> <li>dross of iron</li> </ul>	<ul style="list-style-type: none"> <li>steelmill</li> <li>foundry</li> </ul>	
Material combination	<ul style="list-style-type: none"> <li>electro-welding</li> <li>difusion welding</li> </ul>	<ul style="list-style-type: none"> <li>automotive industry</li> <li>mechanical industry</li> </ul>	
Material separation	<ul style="list-style-type: none"> <li>extraction</li> <li>vacuum-filtration</li> <li>evaporation and freeze drying</li> <li>distillation</li> </ul>	<ul style="list-style-type: none"> <li>food production</li> <li>pharmaceutic industry</li> <li>chemical industry</li> </ul>	
Separation and combination of material	<ul style="list-style-type: none"> <li>drying</li> <li>degasing of electrical isolation material</li> <li>impregnation</li> <li>spilling</li> </ul>	<ul style="list-style-type: none"> <li>mechanical industry</li> <li>electric industry</li> </ul>	
Production and structuring of thin surfaces	<ul style="list-style-type: none"> <li>polimerisation</li> <li>ionisation</li> <li>polarization</li> <li>metallization</li> </ul>	<ul style="list-style-type: none"> <li>automotive industry</li> <li>production of flat screens</li> <li>production of semi conductors</li> <li>optical industry</li> </ul>	
Vessel evacuation	<ul style="list-style-type: none"> <li>condenser degasing</li> <li>nuclear research</li> <li>space simulation</li> </ul>	<ul style="list-style-type: none"> <li>thermoelectric plant</li> <li>nuclear industry</li> <li>aerospace industry</li> </ul>	



**High Vacuum Blowers: ROBUSCHI RBS/AV**

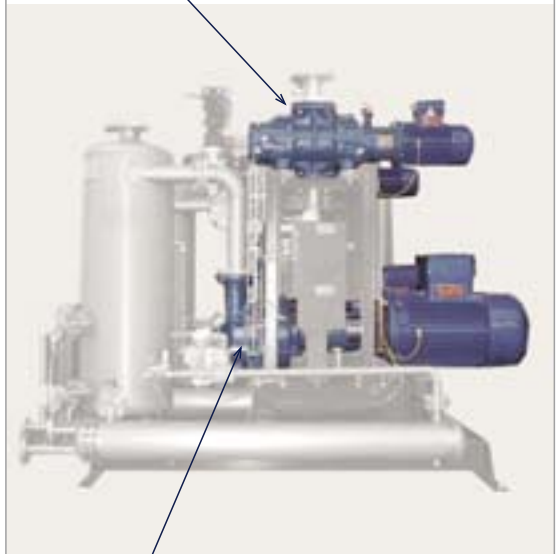

**VP Liquid ring vacuum pumps: ROBUSCHI RVS**


## PERFORMANCE

Blower size	BLOWER THEORETICAL SUCTION CAPACITY		DIFFERENTIAL PRESSURE MAX mbar	MOTOR POWER 50 Hz kW
	3000 RPM m³/h	3600 RPM m³/h		
35	360	430	130	1.5
45	500	600	140	2.2
65	970	1165	90	4.0
85	2125	2550	80	5.5
105	3815	4575	55	7.5
125	7380	8855	45	11.0




## OVERALL DIMENSIONS

### RBS.../AV-V-SGA

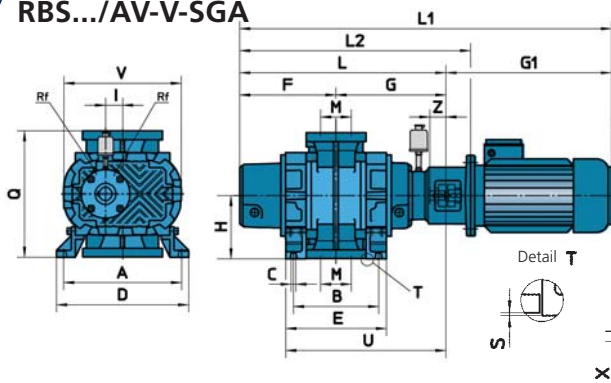

### RBS.../AV-H-SGA

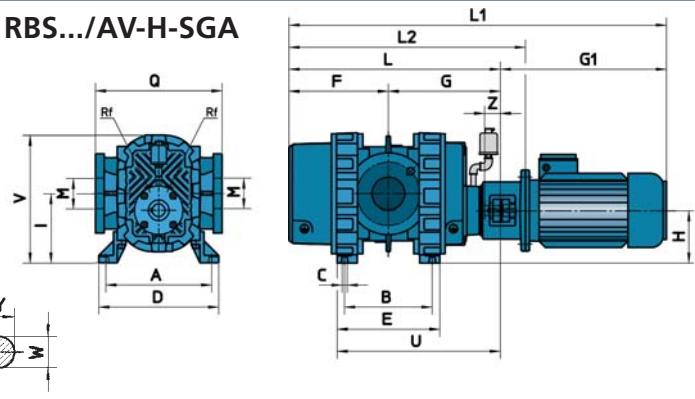

### RBS.../AV-V-SGA


Type	A	B	C	D	E	F	G	G1	H -0,5	I	L	L1	L2	M	Q	S	U	V	W	Z	X	Y	KW	Motor	Weig. kg
35	295	215	12	331	251	243	266	299	160	42.5	509	806	561	80	319	1	391	295	24	40	8	27	1.5	90/S2	98
45	295	275	12	331	311	273	296	324	160	42.5	569	893	621	80	319	1	451	295	24	40	8	27	2.2	90/L2	111
65	340	341	14	385	387	340	361	410	185	53.5	701	1111	768	150	369	1	555	345	28	60	8	31	4	112/M2	185
85	370	431	18	420	482	405	431	450	225	67.5	836	1286	924	150	449	1	671	415	32	80	10	35	5.5	132/S2	295
105	430	501	18	486	557	463	483	450	265	84	946	1396	1060	200	529	1	771	522	38	80	10	41	7.5	132/S2	550
125	550	590	22	640	646	528	594	450	300	106	1122	1572	1205	250	599	1	917	618	42	110	12	45	7.5	132/S2	656

### RBS.../AV-H-SGA

Type	A	B	C	D	E	F	G	G1	H -0,5	I	L	L1	L2	M	Q	S	U	V	W	Z	X	Y	KW	Motor	Weig. kg
35	266	215	12	302	251	243	266	299	132	175	509	808	561	80	318		391	320	24	40	8	27	1.5	90/S2	96
45	266	275	12	302	311	273	296	324	132	175	569	893	621	80	318		451	320	24	40	8	27	2.2	90/L2	109
65	283	341	14	328	387	340	361	410	160	213	701	1111	768	150	368		555	385	28	60	8	31	4	112/M2	182
85	325	431	18	375	482	405	431	450	180	247	836	1286	924	150	448		671	455	32	80	10	35	5.5	132/S2	291
105	392	501	18	448	557	463	483	450	200	284	946	1396	1060	200	528		771	545	38	80	10	41	7.5	132/S2	546
125	435	590	22	566	646	528	594	450	250	356	1122	1572	1205	250	598		917	670	42	110	12	45	7.5	132/S2	650

### Drilling for flat flanges PN10 UNI 2236 o ANSI 125 FF

RF Cooling connection G 1/4\*  
Dimension W with tolerance k6



#### PN10 UNI 2236

M DN	N	O	P	HOLES
80	160	200	18	4
100	180	230	18	8
150	240,2	285	23	8
200	296	340	23	8
250	350	405	24	12

#### ANSI 125 FF

M inch	N	O	P	HOLES
3"	152,4	200	18	4
4"	190,5	230	18	8
6"	240,2	285	23	8
8"	296	340	23	8
10"	362	405	24	12

### ROBUSCHI & C s.p.A. - Head office and factory

Via S. Leonardo, 71/A - 43100 Parma - Italy - Tel. +39 0521 274911/91 - Fax +39 0521 771242

E-mail: [robuschi@robuschi.it](mailto:robuschi@robuschi.it) - [www.robuschi.com](http://www.robuschi.com)

#### FILIALE DI MILANO

Via XXV Aprile, 2 - 20097 S. Donato (Milano)

Tel. +39 02 51628065 - Fax +39 02 51620224

E-mail: [robuschimi@robuschi.it](mailto:robuschimi@robuschi.it)

#### FILIALE DI PADOVA

Piazza Zanellato,5 - 35129 Padova

Tel. +39 049 8078260 - Fax +39 049 8078183

E-mail: [robuschjpd@robuschi.it](mailto:robuschjpd@robuschi.it)

# ROBUSCHI®



## ROBUSCHI®

GERMANY  
Ahnser Strasse 5 - 31675  
Bückeburg - Germany  
Tel. +49 5722 2856-0  
Fax +49 5722 2856-99  
E-mail: [robuschi@robuschi.de](mailto:robuschi@robuschi.de)  
[www.robuschi.de](http://www.robuschi.de)

## ROBUSCHI®

BENELUX  
Kanaaldijk 100 - 6956  
AX Spankeren - Netherlands  
Tel. +31 313 41 5570  
Fax +31 313 41 5433  
E-mail: [robuschi@robuschi-benelux.nl](mailto:robuschi@robuschi-benelux.nl)  
[www.robuschi-benelux.nl](http://www.robuschi-benelux.nl)

## ROBUSCHI®

DANMARK  
Fuglebaekvej 3 A, 1 - 2770  
Kastrup - Denmark  
Tel. +45 70257800  
Fax +45 70 257900  
E-mail: [sales@robuschi.dk](mailto:sales@robuschi.dk)  
[www.robuschi.dk](http://www.robuschi.dk)

## ROBUSCHI®

CHINA  
218 Tianmu Road West - Suit 1208,  
Building No. 2, Kerry Everbright City - 200070  
Shanghai - China  
Tel. +86 21 6317 5461 / +86 21 6317 6461  
Fax +86 21 6317 7312  
E-mail: [robuschichina@robuschichina.com](mailto:robuschichina@robuschichina.com)  
[www.robuschichina.com](http://www.robuschichina.com)

## ROBUSCHI®

FRANCE  
6, rue de la Grande Borne - 77990  
Le Mesnil Amelot - France  
Tel. +33 1 60037569  
Fax +33 1 60037577  
E-mail: [robuschi.fr@wanadoo.fr](mailto:robuschi.fr@wanadoo.fr)  
[www.robuschi.fr](http://www.robuschi.fr)

## ROBUSCHI®

USA Inc.  
6135 Park South Drive, Suite 510 - 28210  
Charlotte (NC) - USA  
Tel. +1 704 945 7175  
Fax +1 704 945 7115  
Toll free: 866.647.9990  
E-mail: [sales@robuschiusa.com](mailto:sales@robuschiusa.com)  
[www.robuschiusa.com](http://www.robuschiusa.com)